

EFFICIENT - RELIABLE - INNOVATIVE










100 mm higher

EFFICIENT - RELIABLE - INNOVATIVE

Differences to AUXX:

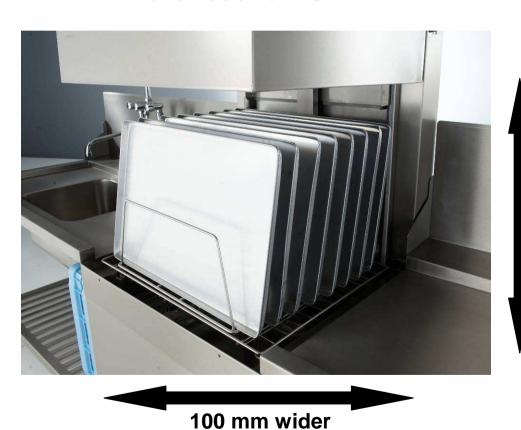

useable inner dimension:

- 660 mm width
- 540 mm height
- 500 (530) mm depth

Covers trays up to 2/1 GN!




EFFICIENT - RELIABLE - INNOVATIVE



Using AUXXL as a potwasher:

The software allows to lock the high pressure wash mode temporarily (customer mode) or even steadily (service mode) to avoid repeated manual activation for every cycle.

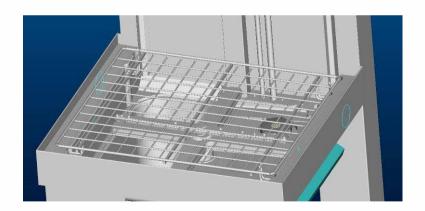

A flat wire mesh insert may replace the standard rack track



EFFICIENT - RELIABLE - INNOVATIVE

Further applications:












EFFICIENT - RELIABLE - INNOVATIVE

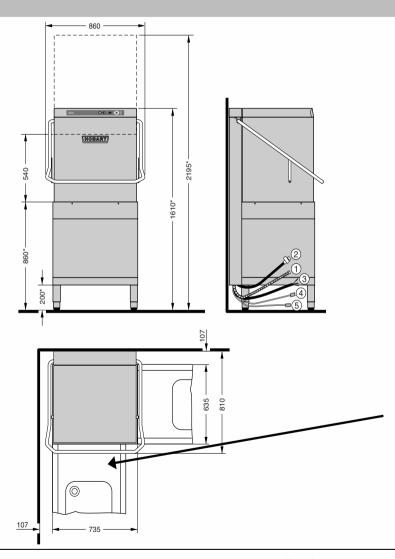

Attention:

In case of **corner installations** we recommend to use standard tabling (540 mm profile) fixed on the left side of the wider front – see drawing.

A kit for the necessary modification of the rack track is supplied with every machine.



EFFICIENT - RELIABLE - INNOVATIVE



Attention with standard front tables and **corner installations**:

for washing **trays bigger than GN-size** you need to order a specific rack which brings the trays to a higher level above the tabling profile (not possible with 2/1 GN)



EFFICIENT - RELIABLE - INNOVATIVE

